

Specifications

Nominal Voltage	6V	
Nominal Capacity (20HR)	14AH	
Dimension	Length	108 mm (4.25 inches)
	Width	71 mm (2.80 inches)
	Height	141 mm (5.55 inches)
	Total Height (with Terminal)	141 mm (5.55 inches)
	Approximate Weight	2.17 kg (4.78 lbs)
Battery Type	Valve Regulated Lead-Acid Battery, AGM Design	
Terminal Type	RT	
Rated Capacity	9.00AH	(20hr, 1.75V/cell, 25°C/77°F)
	8.60AH	(10hr, 1.75V/cell, 25°C/77°F)
	7.65AH	(5hr, 1.75V/cell, 25°C/77°F)
	8.43AH	(3hr, 1.60V/cell, 25°C/77°F)
	5.99AH	(1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	195A	
Internal Resistance	12mΩ	
Operating Temp. Range	Discharge:	-20°C(-4°F)~50°C(122°F)
	Charge:	-20°C(-4°F)~50°C(122°F)
	Storage:	-20°C(-4°F)~40°C(104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Container Material	ABS (Option: 94-HB & 94-V0 flame retardant case)	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	CB Range of batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is recommended. For higher temperatures the time interval will be shorter.	



Applications

- Uninterruptible Power Supply (UPS)
- Electric wheelchairs, scooters, bikes
- Electronic apparatus and equipment
- Alarm and security systems
- Emergency first responder equipment
- Emergency lighting
- Medical devices
- Electric carts
- Telecom equipment
- Switchgear
- Solar power systems



Constant Current Discharge (Amperes Per Battery) at 25°C (77°F)

F.V. (V/cell) \ Discharge Time	5min	10min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	50.2	34.1	25.2	15.0	8.16	4.75	3.66	2.41	1.58	1.31	0.681
1.65V	45.5	31.4	23.6	14.2	8.09	4.55	3.55	2.33	1.56	1.29	0.677
1.70V	41.3	29.1	22.2	13.4	7.90	4.49	3.41	2.27	1.54	1.27	0.668
1.75V	37.5	26.7	20.8	12.9	7.66	4.38	3.32	2.21	1.51	1.24	0.657
1.80V	33.2	24.3	19.0	12.4	7.32	4.22	3.26	2.15	1.49	1.21	0.650
1.85V	24.8	19.0	15.7	10.5	6.54	3.87	3.03	2.01	1.40	1.17	0.644




Constant Power Discharge (Watts Per Cell) at 25°C (77°F)

F.V. (V/cell) \ Discharge Time	5min	10min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	83.2	57.9	44.2	27.3	15.3	9.00	6.99	4.64	3.08	2.57	1.35
1.65V	77.2	54.6	42.0	26.0	15.3	8.68	6.82	4.50	3.05	2.54	1.34
1.70V	71.0	51.1	39.8	24.8	15.0	8.60	6.57	4.40	3.01	2.50	1.32
1.75V	66.3	47.9	37.8	24.0	14.6	8.41	6.40	4.30	2.97	2.45	1.30
1.80V	60.1	44.3	35.0	23.3	14.0	8.14	6.31	4.20	2.93	2.39	1.29
1.85V	45.3	35.1	29.4	20.1	12.6	7.51	5.90	3.93	2.77	2.32	1.27


Dimensions

RT Terminal


Unit: mm (inches)

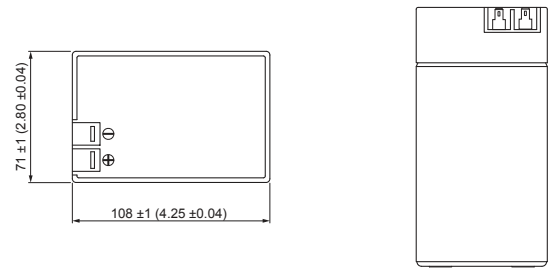


Cycle Service Life

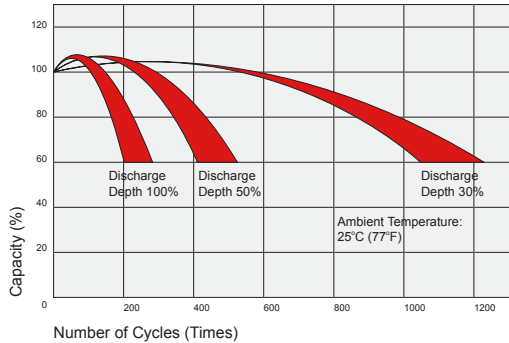


Self Discharge Characteristics

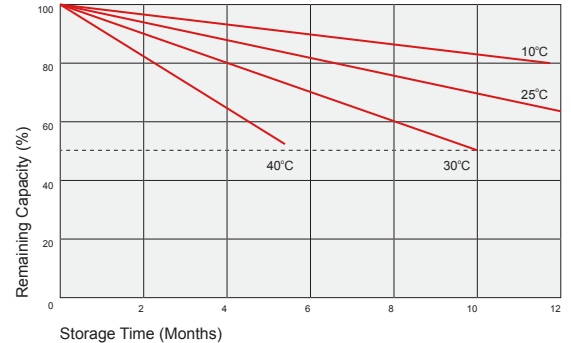


Discharge Characteristics

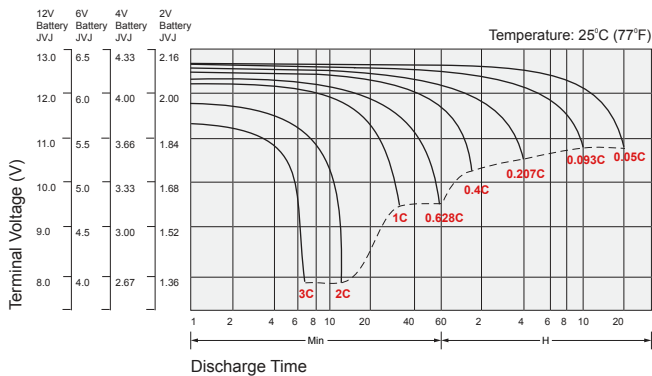


Float Charging Characteristics

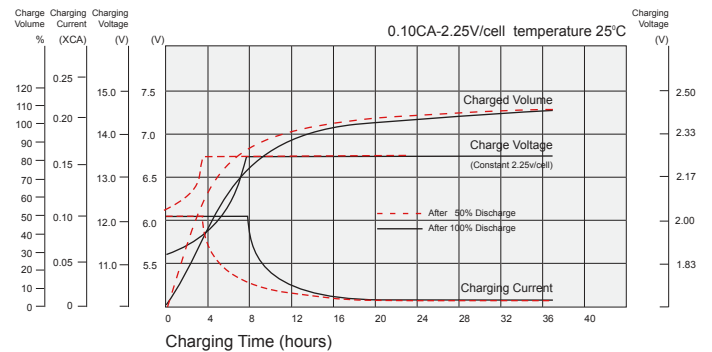

Temperature Effects in Relation to Battery Capacity

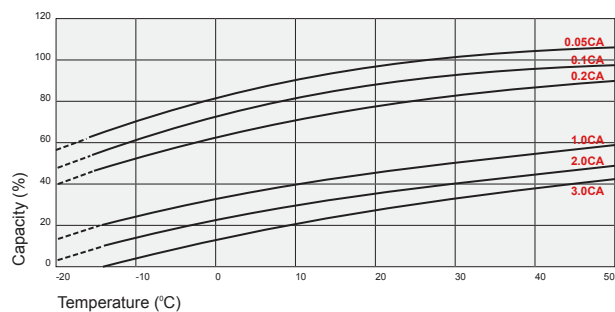

Temperature Effects on Long Term Float Life

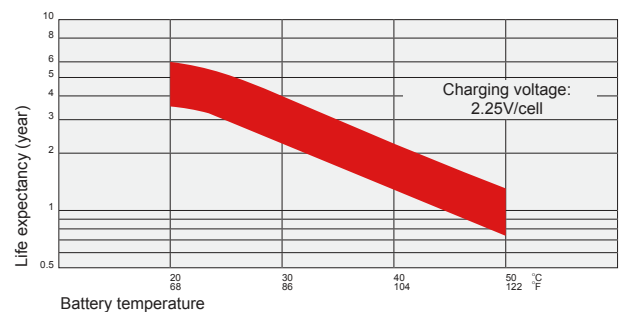

Contact Information

Canadian Batteries
PO Box 154,
Buckhorn, Ontario
K0L 1J0 Canada

T: +1-888-730-8658
F: +1-705-201-5466
www.canadianbatteries.com